

Roxil[®]

FURNITURE KIT GUIDE



Step by Step Directions for a Superior Finish

INCLUDED IN THE KIT:

- Roxil® Wood Scrub Gel
- Easy Grip Scrubbing brush
- Sanding blocks
- Roxil® Top Oil 302
- Roxil® Wood Preserver
- 2" (50mm) paint brush
- Microfibre cloth



BEFORE YOU START



Brush away leaves, dust or dirt from the furniture to be treated and **remove any existing coatings**, like old varnish.



Lightly sand the surface using the provided block, applying light and even pressure in the direction of the grain.



Complete the above steps before continuing

PREPARE

FROM THE KIT:

Roxil® Wood Scrub Gel

Sanding blocks

Scrubbing brush

2" (50mm) paint brush



HOW TO APPLY:

Dampen the wooden surface with water.

Apply **Roxil® Wood Scrub Gel** with the paint brush, in the direction of the wood grain.



Use the scrubbing brush to thoroughly work the gel into the wood's surface.

Rinse thoroughly with water when finished.



Lightly sand again to remove any raised wood grain or imperfections.

*Repeat until the surface is **smooth to the touch**.*




Clean and revive weathered wood

PRESERVE

FROM THE KIT:

Roxil® Wood Preserver
2" (50mm) paint brush

Start with a thoroughly cleaned and dried brush.



HOW TO APPLY:

Ensure the surface is fully dry before starting.
Sweep away any loose material so that the wood is clean and clear of debris.

4




Apply **Roxil® Wood Preserver** directly to the wood in smooth, even strokes until the surface is fully coated.

5



Once the first coat has fully absorbed, apply a second coat.

6

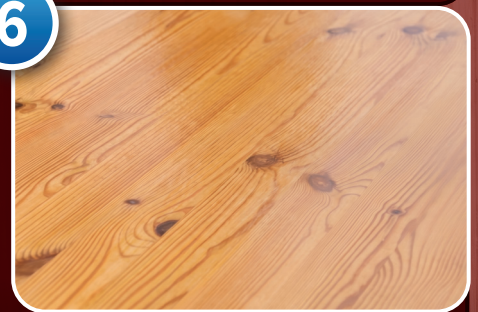

Absorption times vary due to porosity of wood.

Guard against wood-boring insects and wood-rotting fungi

PROTECT

FROM THE KIT:

Roxil® Top Oil 302
Microfibre cloth

*Fold the cloth into
a neat, workable pad.*



HOW TO APPLY:

Ensure the surface is fully dry before starting.
Pour a small amount of **Roxil® Top Oil 302**
onto the middle of the cloth pad.

7



Rub the oil along the grain in small sections,
using light pressure and overlapping passes.
Allow the oil to fully absorb into the wood.

8



Wipe off any excess with a clean part of cloth.
To finish, apply 2 more coats for a matt
seal, or 3+ for increasing levels of gloss.

9



Enrich and protect wood grain from the effects of weathering



Rated 4.7 out of 5



**TIMBER
DEVELOPMENT
UK** MEMBER



TRUSTED BY THOUSANDS WORLDWIDE

PREPARE

PRESERVE

PROTECT



Roxil®

To discover the full Roxil® range, visit
safeguardeurope.com/roxil

Safeguard Europe Ltd., Redkiln Close, Horsham, West Sussex. United Kingdom RH13 5QL.

T 01403 210204 E info@safeguardeurope.com